

MOUNTING POSTS

ACCESS CONTROL



Standard
Gooseneck

Architectural
Style Offset

Designer
Style Offset

FULL RANGE OF MOUNTING POSTS, WHETHER IT'S FOR VEHICULAR TRAFFIC OR PEDESTRIAN TRAFFIC REQUIREMENTS

- All posts are easily pad mounted - or if a mounting pad does not exist, an in-ground adapter makes mounting quick and easy
- All posts feature a cover to hide mounting bolts
- Heavy-duty posts are available in offset style for vehicular traffic, or a straight style for walk-up pedestrian traffic
- Designer style posts have provisions for accessory transformers, surge suppressors, radio receiver and optional light assembly and tower

APARTMENT COMPLEXES • COLLEGE RESIDENTS HALLS • MIXED USE BUILDINGS • COMMERCIAL • INDUSTRIAL • PARKING • MAXIMUM SECURITY • RESIDENTIAL • SELF STORAGE



Optional Light
assembly and tower for designer style



Baked On Enamel Finish
for weather resistance




Mounting Bolt Cover
on all styles



Designer Style Compartment
for accessory transformers, surge suppressors, radio receiver



MOUNTING POSTS ACCESS CONTROL

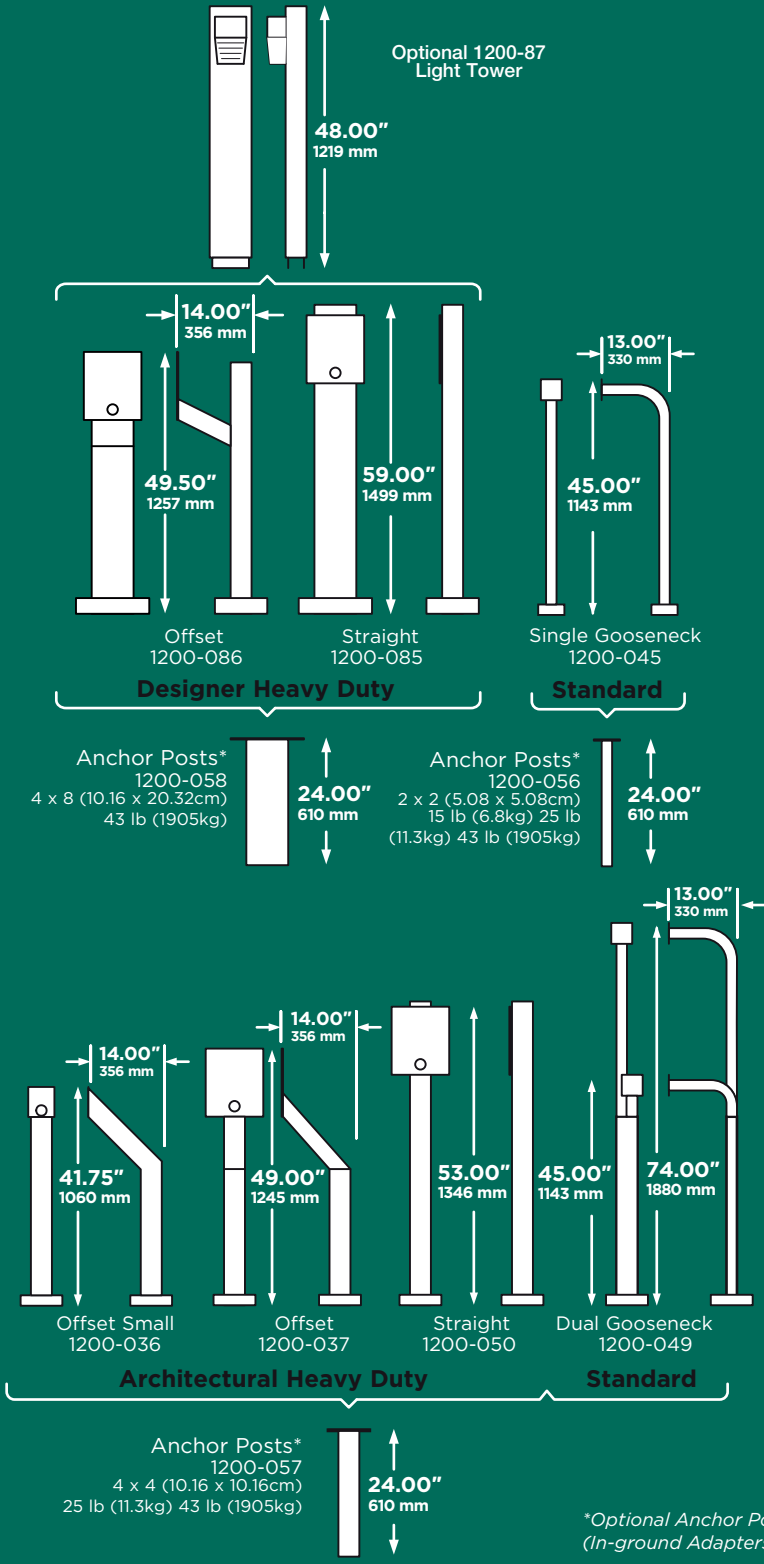

TECHNICAL FEATURES

OPTIONS

In-ground adapters

All adapters are 24 inches (61cm) tall sized to match their respective posts

All adapters include 1/2-13 x 2 inch (5.08cm) long mount bolts

Adapter plates

Use with Standard and Offset Small mounting posts to mount 1802, 1802-EPD, and 1819 telephone entry systems to these posts

DESIGNER STYLE

Constructed from 4 x 8 (10.16 x 20.3cm) steel

11 inch x 13 inch (27.9 x 33cm) mounting plate for full size DKS telephone entry system

Locked accessory compartment holds 4 transformers, 3 surge suppressers and an RF radio receiver

10 inch x 14 inch (25.4 x 35.56cm) base plate

Available in offset or straight styles

Offset style is 49.5 inches (125.7cm) tall with 14 inch (35.56cm) offset from back of post - 55 Lbs (24.9kg)

Straight style is 59 inches (150cm) tall - 65 Lbs (29.5kg)

Optional light tower and light assembly - 45 Lbs (20.4kg)

Tower adds 48 inches (121.9cm) to top (does not include light assembly)

Light assembly includes 120 volt flourscent light

Light sensor automatically turns light on at dusk, off at dawn

RF coax antenna mounting hole

ARCHITECTURAL STYLE

Constructed from 4 x 4 (10.16 x 10.16cm) steel

11 inch x 13 inch (27.9 x 33cm) mounting plate for full size DKS telephone entry systems

Small mounting face for card readers, keypads, and smaller access control devices (adapter plate available to mount 1802, 1802EPD, and 1819 DKS telephone entry systems)

8 inch x 8 inch (20.32 x 20.32cm) base plate

Available in offset or straight styles Offset style is 49 inches (124.5cm) tall with 14 inch (35.56cm) offset from back of post - 40 Lbs (18.1kg)

Straight style is 59 inches (150cm) tall

48 Lbs (21.8kg) Offset Small is 41.75 inches (106.05cm) tall

GOOSENECK STYLE STANDARD

Constructed from 2 x 2 (5.08 x 5.08cm) steel.

Dual style uses 2 inch x 4 inch (5.08 x 10.16cm) steel up to 36 inches (91.4cm)

4 inch x 4 inch (10.16 x 10.16cm) mounting plate for keypads, card readers, etc.

Offsets are 13 inches (33cm) from back of post

Available in single or dual mounting height styles

Single style is 45 inches (114.3cm) tall with 5 inch x 5 inch (12.7 x 12.7cm) base plate - 25 Lbs (11.3kg)

Dual style is 74 inches (188cm) tall with 8 inch x 8 inch (20.32 x 20.32cm) base plate - 50 Lbs (22.7kg)

DoorKing® Inc.

Access Control Solutions since 1948



120 S. Glasgow Avenue,
Inglewood, California 90301 U.S.A.
Tel: 310-645-0023 FAX: 310-641-1586
www.doorking.com

© 2021 All Rights Reserved.
Product specifications may
change without notice. Rev.5/21



MEMBER:



DISTRIBUTED BY:

