

ACM Series

Power Supply/Chargers with Multi-Output Access Power Controllers

Altronix ACM series distribute and switch power to access control systems and accessories. They convert a 115VAC, 60Hz input into eight (8) independently controlled 12VDC or 24VDC fuse protected outputs. These power outputs can be converted to dry form “C” contacts. Outputs are activated by an open collector sink or normally open (NO) dry trigger input from an Access Control System, Card Reader, Keypad, Push Button, PIR, etc. Units will route power to a variety of access control hardware devices including: Mag Locks, Electric Strikes, Magnetic Door Holders, etc. Outputs will operate in both Fail-Safe and/or Fail-Secure modes. The FACP Interface enables Emergency Egress, Alarm Monitoring, or may be used to trigger other auxiliary devices. The fire alarm disconnect feature is individually selectable for any or all of the eight (8) outputs.



AL600ULACM

Key Features

- Eight (8) independently controlled outputs
 - Output options:
 - a) Eight (8) Fail-Safe and/or Fail-Secure power outputs;
 - b) Eight (8) form “C” 5A rated relay outputs;
 - c) Any combination of the above
- Eight (8) auxiliary power outputs (unswitched)
- Output fuses are rated @ 3.5A
- Filtered and electronically regulated outputs
- Supervision:
 - AC Fail
 - Battery Fail and Battery Presence
- Fire Alarm disconnect (latching or non-latching) is individually selectable for any or all of the eight (8) outputs
- Alarm output relay indicates that FACP input is triggered
- Fire Alarm disconnect input options:
 - a) Normally open (NO) or normally closed (NC) dry contact input
 - b) Polarity reversal input from FACP signaling circuit
- Built-in charger for sealed lead acid or gel type batteries
- Instantaneous transfer to stand-by batteries
- UL Listed in the U.S. and Canada
- Lifetime Warranty

ACM Series Power Supply Configuration Reference Chart

Altronix Model Number	115VAC 60Hz Input Current Draw	12VDC Total Output Current	24VDC Total Output Current	Class 2 Rated Power-Limited Outputs	Fused Outputs	Individual Output Rating	Power Supply Board Input Fuse Rating	Power Supply Board Battery Fuse Rating	Batteries Accommodated by Enclosure	
AL400ULACM	3.5A	4A	3A	✓	8	2.5A	5A/250V	15A/32V	Up to two (2) 12AH / 12VDC	
AL400ULACMJ									Up to two (2) 18AH / 12VDC	
AL600ULACM	3.5A	6A	6A	-				15A/32V	-	Up to two (2) 12AH / 12VDC
AL600ULACMJ										Up to two (2) 18AH / 12VDC
AL1012ULACM	2.6A	10A	-	-			6.3A/250V	15A/32V	Up to two (2) 12AH / 12VDC	
AL1012ULACMJ									Up to two (2) 18AH / 12VDC	
AL1024ULACM	4.2A	-	10A	-			6.3A/250V	15A/32V	Up to two (2) 12AH / 12VDC	
AL1024ULACMJ									Up to two (2) 18AH / 12VDC	

Lifetime Warranty



ACM Series

Power Supply/Chargers with Multi-Output Access Power Controllers

Specifications

Input

Voltage 115VAC, 60Hz
 Input Fuse Varies, see Reference Chart

Outputs

Voltage 12VDC or 24VDC, see Reference Chart
 Current Varies, depending on the model
 Protection Fused 3.5A
 Auxiliary 3.5A (unswitched)
 Other Overvoltage protection
 Filtered and regulated outputs

Battery Charging

Capacity 12AH/12VDC (1 or 2 within enclosure)
 18AH/12VDC (requires larger "J" enclosure)
 40AH/65AH (requires separate enclosure)
 Type Sealed lead acid or gel type
 Fuse Rating 15A/32V
 AL600ULACM(J) doesn't have a battery fuse
 Failover Upon AC loss, instantaneous
 Batteries are sold separately

Fire Alarm Disconnect

Latching or non-latching, individually selectable for any or all of the eight (8) outputs

Supervision

AC Failure Form "C" contacts (rated 1A @ 28VDC)
 Battery Form "C" contacts (rated 1A @ 28VDC)

Indicators (LED)

Input 115VAC is present
 DC Output Powered
 Battery Discharged or not connected
 Relays Individual LEDs indicate outputs are triggered (relays energized)
 FACP Indicates FACP disconnect is triggered

Agency Listings

All Models:

UL:

UL294 Access Control System Units

cUL:

CSA C22.2 No.205 Signal Equipment

AL400ULACM(J), AL600ULACM(J) only:

CSFM

California State Fire Marshall Approved

Physical and Environmental

Enclosure Dimensions (H x W x D)

AL400ULACM, AL600ULACM, AL1012ULACM, AL1024ULACM:

Enclosure:

15.5" x 12" x 4.5" (393.7mm x 304.8mm x 114.3mm)

Shipping:

16.5" x 13.5" x 6" (419.1mm x 342.9mm x 152.5mm)

AL400ULACMJ, AL600ULACMJ, AL1012ULACMJ, and AL1024ULACMJ:

Enclosure:

18" x 14.5" x 4.625" (457.2mm x 368.3mm x 117.5mm)

Shipping:

21.75" x 18.25" x 5.75" (552.5mm x 463.6mm x 146.1mm)

Weight (approx.)

Model	Product Weight	Shipping Weight
AL400ULACM	10.7 lb. (4.85 kg)	12 lb. (5.44 kg)
AL400ULACMJ	14 lb. (6.35 kg)	15 lb. (6.8 kg)
AL600ULACM	10.3 lb. (4.67 kg)	11.6 lb. (5.26 kg)
AL600ULACMJ	14.85 lb. (6.74 kg)	17.1 lb. (7.76 kg)
AL1012ULACM	10.7 lb. (4.85 kg)	12 lb. (5.44 kg)
AL1012ULACMJ	14.1 lb. (6.40 kg)	15 lb. (6.80 kg)
AL1024ULACM	11.75 lb. (5.33 kg)	13.05 lb. (5.92 kg)
AL1024ULACMJ	14.9 lb. (6.76 kg)	16.1 lb. (7.3 kg)

Temperature

Operating:

0°C to 49°C (32°F to 120°F)

Storage:

- 20°C to 70°C (- 4°F to 158°F)

Relative Humidity

85% +/- 5%

BTU/Hr. (approx.)

Model	12VDC BTU/Hr.	24VDC BTU/Hr.
AL400ULACM(J)	25	37
AL600ULACM(J)	37	74
AL1012ULACM(J)	61	N/A
AL1024ULACM(J)	N/A	123

Lifetime Warranty

Altronix Corporation | 140 58th St | Brooklyn, NY 11220 USA


phone: +1 718.567.8181 | fax: +1 718.567.9056 | email: info@altronix.com | www.altronix.com

ACM Series

Power Supply/Chargers with Multi-Output Access Power Controllers

Dimensions and Drawing

AL400ULACM, AL600ULACM, AL1012ULACM, AL1024ULACM Dimensions (H x W x D approximate)
15.5" x 12" x 4.5" (393.7mm x 304.8mm x 114.3mm)

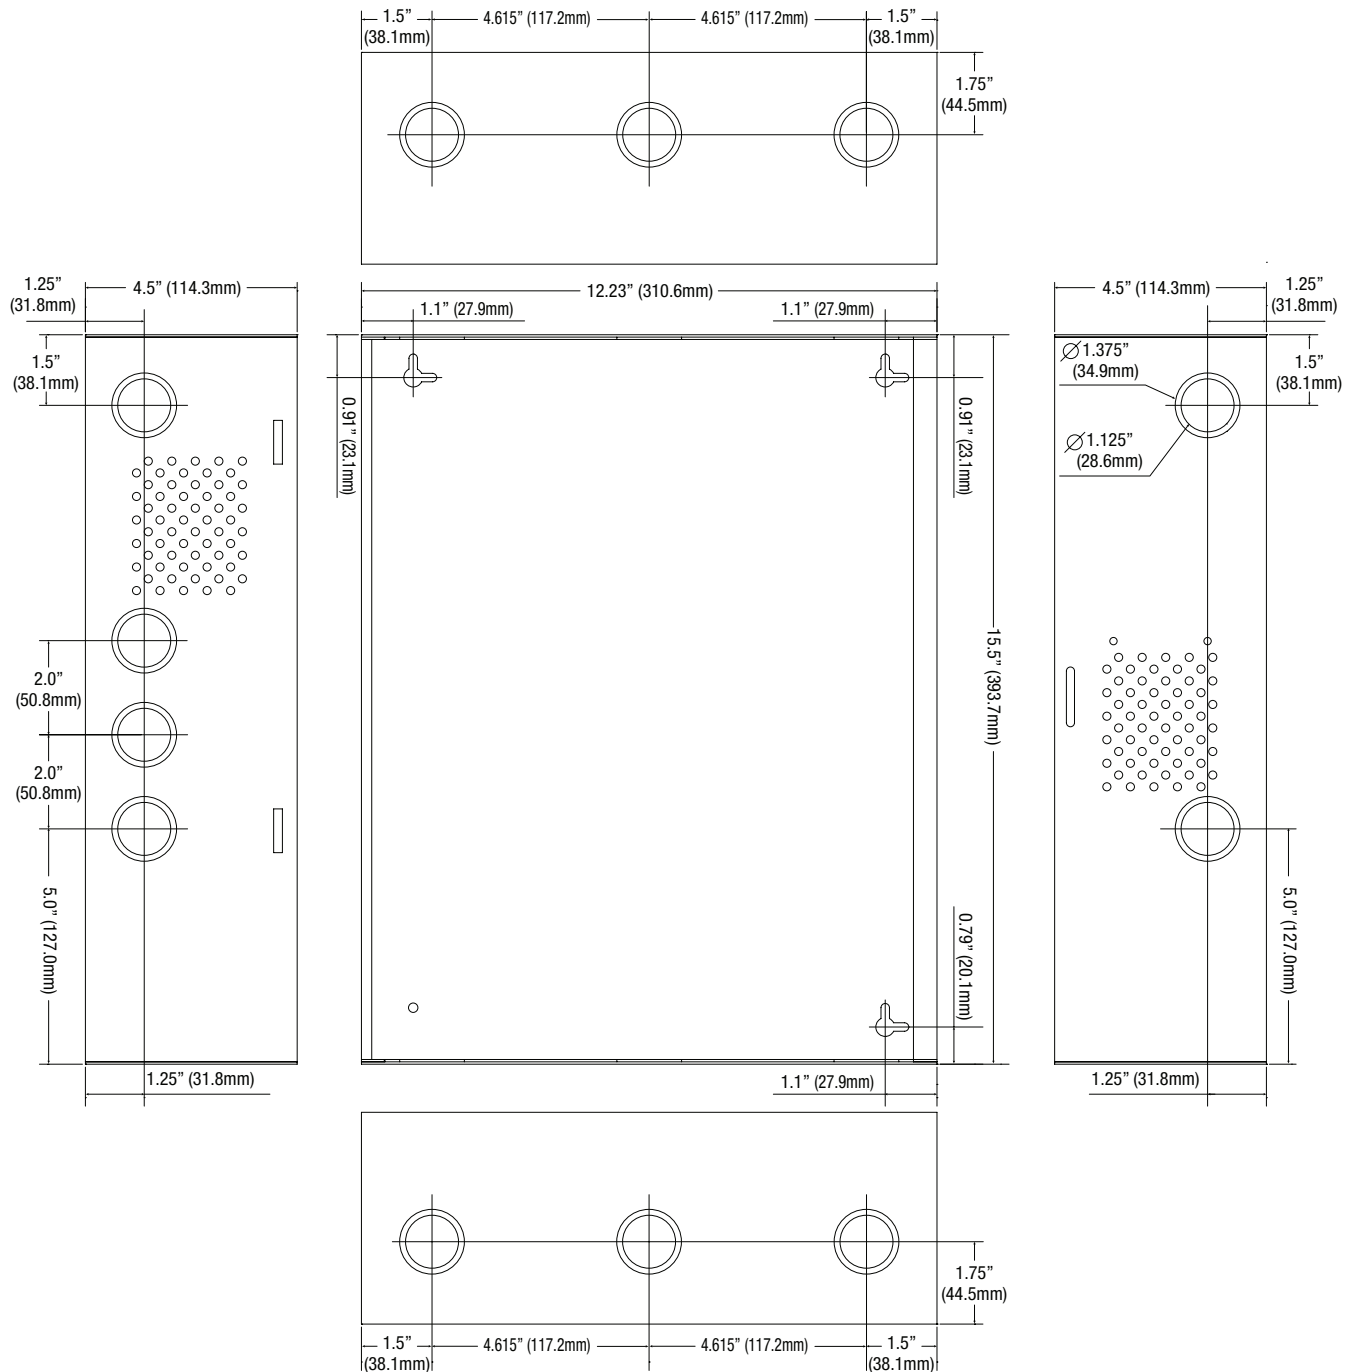


Lifetime Warranty

ACM Series

Power Supply/Chargers with Multi-Output Access Power Controllers

Dimensions and Drawing

AL400ULACMJ, AL600ULACMJ, AL1012ULACMJ, and AL1024ULACMJ Dimensions (H x W x D approximate)
18" x 14.5" x 4.625" (457.2mm x 368.3mm x 117.5mm)

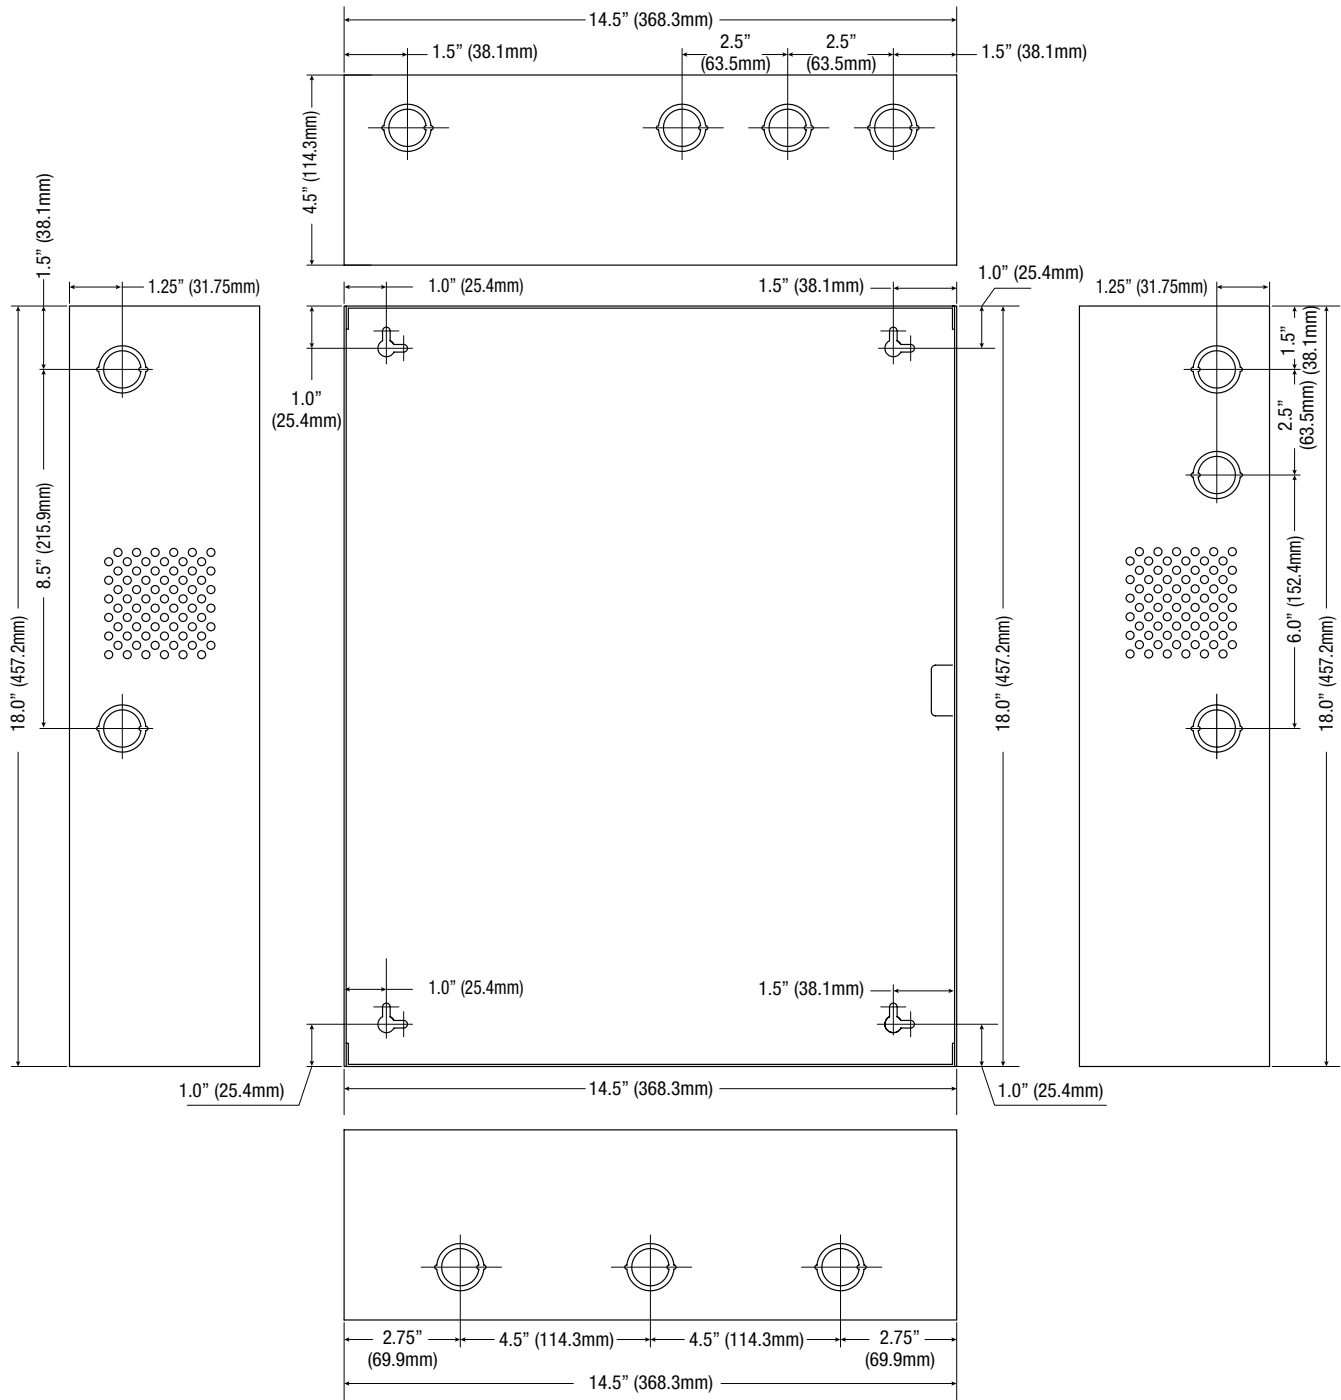

Lifetime Warranty