

## INTERCOM COLUMN

# Obelisk OB-01


EAN: 5060514914540 (WOOD)  
EAN: 5060514914557 (ROCK)  
EAN: 5060514914564 (GRANITE)  
EAN: 5060514914571 (STAINLESS)  
EAN: 5060514914588 (STEEL)  
EAN: 5060514914595 (MOSS)  
EAN: 5060514914601 (COMPOUND)  
EAN: 5060514914618 (GLASS)  
EAN: 5060514914625 (PLEXIGLASS)  
EAN: 5060514914632 (PLATE)

This is a unique intercom column with a 10" built-in high-resolution IPS touch screen, the image from which is perfectly visible even on a bright sunny day, an integrated surveillance camera, an intercom device and a navigation system for the residential complex or territory where the device is installed.

The Obelisk provides additional security, by not allowing strangers to enter the grounds of the complex. In addition, recognising you by your face, you can be reminded about an upcoming holiday for children in the complex today or simply be provided with personalised information.

### Main features

- Display: 10" IPS LCD, color, with backlight and heated under plate.
- Screen resolution: 600 x 1024 pixels.
- Keyboard: Sensor.
- Camera: 1/4".
- Camera angle: 120° (horizontal).
- Camera resolution: 2.0 Mp.
- Output video: Full HD (1920x1080), H.264 Main Profile.
- Night backlight: 6 LEDs.
- Light sensitivity: 0,01 Lux.
- Protection class: IP65.
- Working temperature: -40 — +65 °C.
- Power consumption: 6,5 W, in standby — 3,6 W.
- Power supply: +12 V DC.
- Body: Metal.
- Dimensions: 202,2 x 34,0 x 14,2 cm.
- Base dimensions: 38,0 x 48,0 cm.

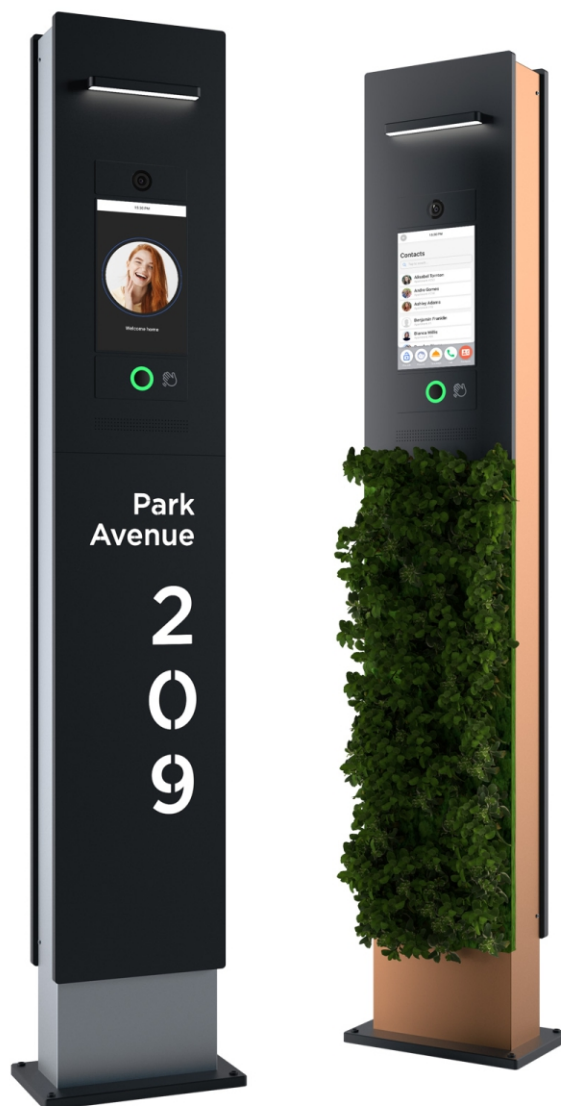

### Functionality

- Automatic face recognition.
- Separate concierge call button.
- Calling the lift.
- Flexible system setup.
- Multi-language graphical and WEB interface.
- Lock opening:
  - By means of a monitor
  - Face Recognition Identification
  - By QR code
  - By guest link
  - By Pin
  - By access card
  - The BAS-IP Intercom app
  - The BAS-IP Link app
  - The BAS-IP UKEY app
  - From API
- Access control integration: WIEGAND-26+ output.
- Authentication: Separate password for settings, WEB - interface and RTSP stream.
- Additionally:
  - Software Link support
  - SIP P2P
  - Built-in relay
  - Proximity sensor
  - Open API