


# CAPXM

Smart Video Intercom - M  
Section 28 13 00

DATA SHEET

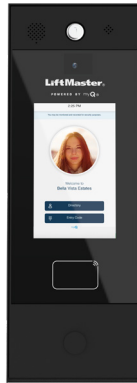

## Key Features

Unit Interface Capabilities

Scheduling Capabilities

Radio Receiver

Wireless Communication

Touchscreen/voice/PIN/card/transmitter/RFID tag

Yes

Included

Yes\*\*

## Specifications

Data Connectivity

Voice Communication

Calling Connectivity

Power Supply

Programming (Database Management)

Remote Programming (Database Management)

Realtime Event Monitoring (Email Notifications)

Software

Wiegand Input Data Format

Wiegand Output Data Format

Local User Capacity Per Unit

Local Event History Per Unit

Max Number of Gates/Doors of Control (Each)

Wiegand Input

Relay Output

Mounting Options

Operating Temperature

Display Type

Display Resolution

Integrated Video Camera

Anti-Tamper Alarm

Warranty

Wi-Fi/cellular/wired high-speed internet/DSL

Wi-Fi/cellular/wired high-speed internet/DSL

VoIP (Phone.com)

120VAC to 24VDC transformer (included)

Cloud (myQ® Community)

Yes

Yes

myQ Community

26 BIT, 30 BIT, 37 BIT (HID), 37 BIT (Transcore), AND 32 BIT (MiFare)

26 BIT

50,000

50,000

2

2

4 (2 primary, 2 auxiliary)

Surface/flush/gooseneck

-20°F to 130°F (-29°C to 54°C)

7-inch full color touch screen with Picture-in-Picture

720p high definition

Yes

Yes

2 years

## Construction

Enclosure Material

Cast Metal, Power Coated Black


**LiftMaster**

# CAPXM

## DATA SHEET

Smart Video Intercom - M  
Section 28 13 00

### Dimensions

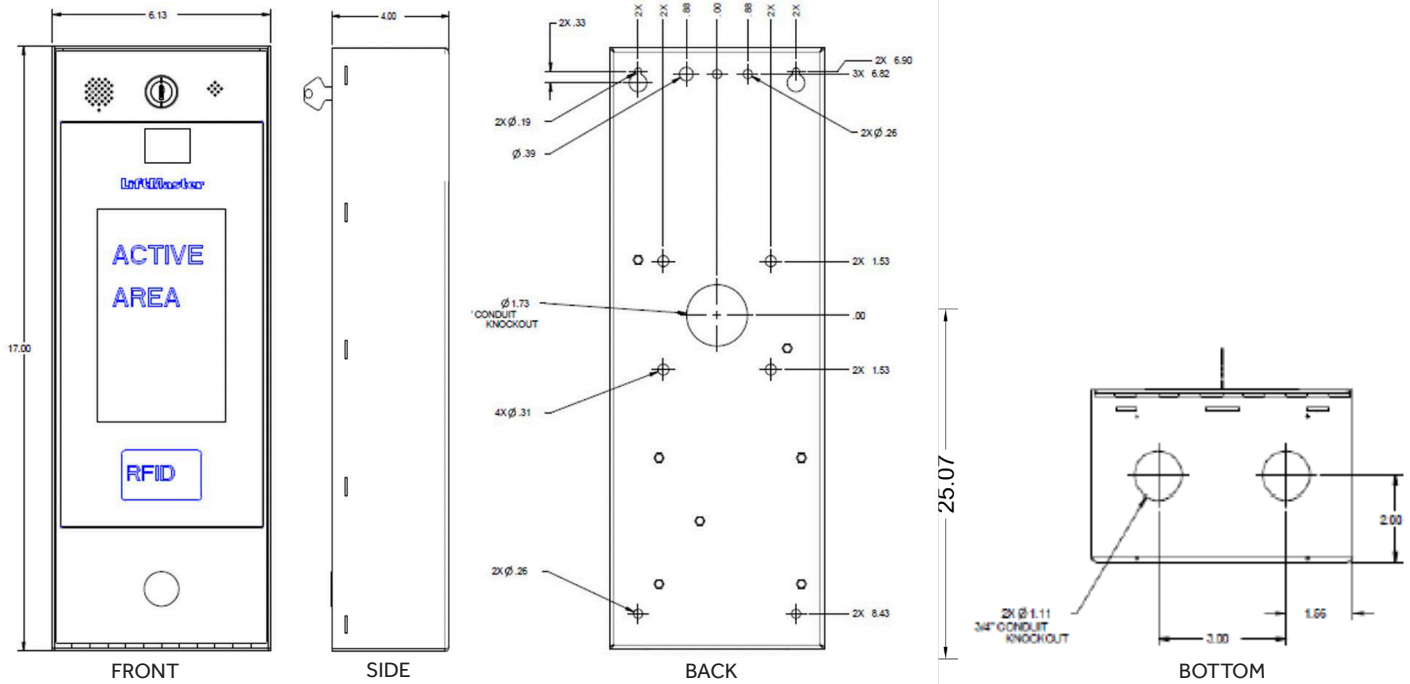

### Range

CAPXM Feature	Wired	Wireless	Wire Type	Range
Power 120VAC to 24VDC transformer (from outlet to controller)	x		2 wire (14 AWG) 2 wire (16 AWG) 2 wire (18 AWG)	Up to 300 ft. Up to 200 ft. Up to 100 ft.
Wiegand accessory wiring	x		7 wire (18-22 AWG)	Up to 500 ft.
Relay output wiring	x		2 wire (18-24 AWG)	Up to 2500 ft.
Exit Request (REX)	x		2 wire (18-24 AWG)	Up to 500 ft.
Supervised Input	x		2 wire (18-24 AWG)	Up to 500 ft.
RJ-45 Internet	x		CAT5e or better 8 strand (24 AWG)	Up to 328 ft.
Wireless link to LiftMaster® Operators		x	N/A	Up to 750 ft.*
Wi-Fi		x	N/A	Up to 250 ft.**

\*When used with LiftMaster® Operators with Security +2.0® Radio

\*\*When used with LiftMaster® Gate Operator mfg. after Nov. 2017

© 2021 The Chamberlain Group, Inc. All Rights Reserved. myQ®, the myQ® logo, myQ® Community, LiftMaster, the LiftMaster logo, are registered trademarks of the Chamberlain Group, Inc. LiftMaster.com

LMACENDSCAPXM 5/21

**LiftMaster**