

# CAPXS

Smart Video Intercom - S  
Section 28 13 00



DATA SHEET

## Key Features

Unit Interface Capabilities  
Scheduling Capabilities

Touchscreen/voice/PIN  
Yes

## Specifications

Data Connectivity

Wi-Fi and Ethernet

Voice Communication

Wi-Fi and Ethernet

Calling Connectivity

VoIP\*

Included Power Supply Ratings

Input: 120 VAC, 60Hz, 1A max

Output: 16 VDC, 2.5 A, 40 W

CAPXS DC input ratings 16 VDC, 10 W max

Cloud (myQ® Community)

Programming (Database Management)

Yes

Remote Programming (Database Management)

Yes

Realtime Event Monitoring (Email Notifications)

Software

myQ Community web portal

Wiegand Input Data Format

26 BIT, 37 BIT (HID), 37 BIT (Transcore), AND 32 BIT (MiFare)

Local User Capacity Per Unit

500

Local Event History Per Unit

3,000

Max Number of Gates/Doors of Control (Each)

1 Door - (Vestibule Mode capable with Aux Relay)

Wiegand Input

1 (only supports data lines, not any LEDs)

Relay Output

2 (1 primary, 1 auxiliary)

Mounting Options

Surface/gooseneck

Operating Temperature

-4°F to 122°F (-20°C to 50°C)

Display Type

5-inch full color touch screen with Picture-in-Picture

Display Resolution

720p high definition

Integrated Video Camera

Yes

Anti-Tamper Alarm Notification

Yes - shock sensor records events and notifications records can be sent via email from myQ Community

Warranty

2 years

## Construction

Enclosure Material

Polycarbonate

Impact Rating

IK07

Weatherproof Rating

IP54


\* LiftMaster uses phone.com exclusively

# CAPXS

DATA SHEET

Smart Video Intercom - S  
Section 28 13 00

## Dimensions

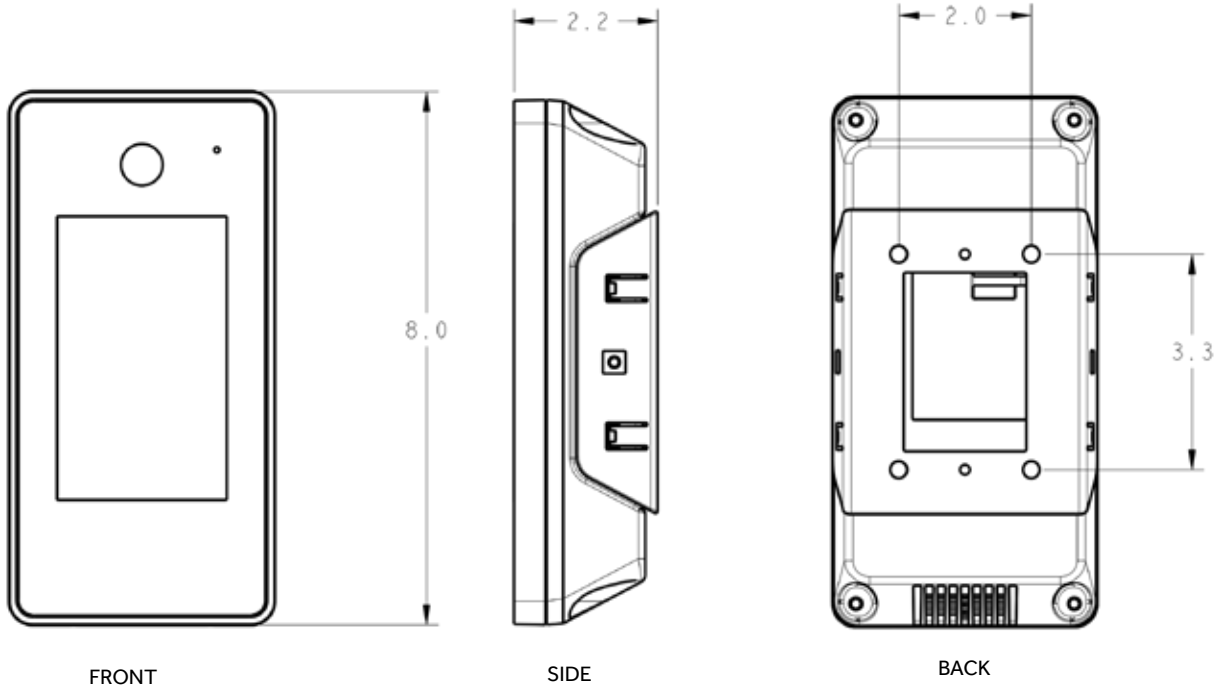

## Range

CAPXS Feature	Wired	Wireless	Wire Type	Range
Power 120VAC to 16VDC transformer (from outlet to controller)	x		2 wire (14 AWG) 2 wire (16 AWG) 2 wire (18 AWG)	Up to 300 ft. Up to 200 ft. Up to 100 ft.
Wiegand accessory wiring	x		3 wire (18-22 AWG)	Up to 500 ft.
Relay output wiring	x		2 wire (18-24 AWG)	Up to 2500 ft.
Exit Request (REX)	x		2 wire (18-24 AWG)	Up to 500 ft.
Supervised Input	x		2 wire (18-24 AWG)	Up to 500 ft.
RJ-45 Internet	x		CAT5e or better 8 strand (24 AWG)	Up to 328 ft.
Wi-Fi		x	N/A	Up to 250 ft.**
Postal Lock (Optional w/Backplate)	x		Included	N/A