




MAGNETIC & ELECTRIC DOOR & GATE LOCKS

ACCESS CONTROL

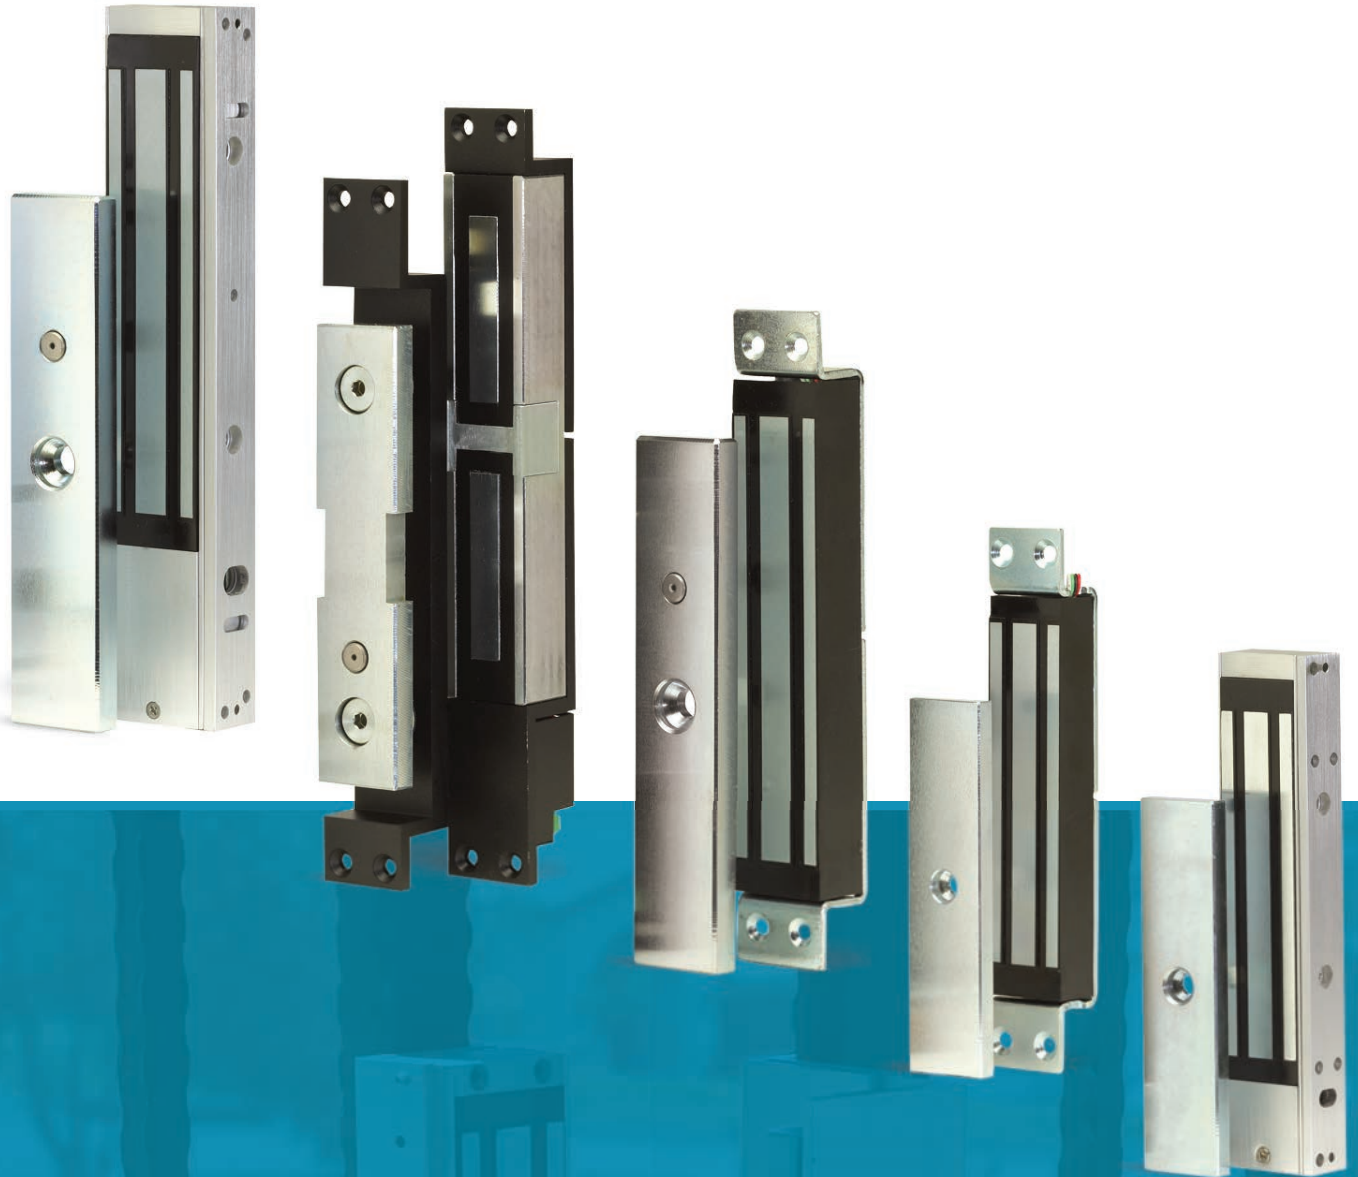


Apartment Complex/Gated Communities • College Residents Halls •
Mixed Use Buildings Residential • Commercial/Industrial • Parking •
Self Storage • Maximum Security

ACCESS CONTROL SOLUTIONS

DKGL MAGNETIC LOCKS FOR GATES


Single Gates - 600 and 1200 Lb
(272 and 544 Kg) lock strength

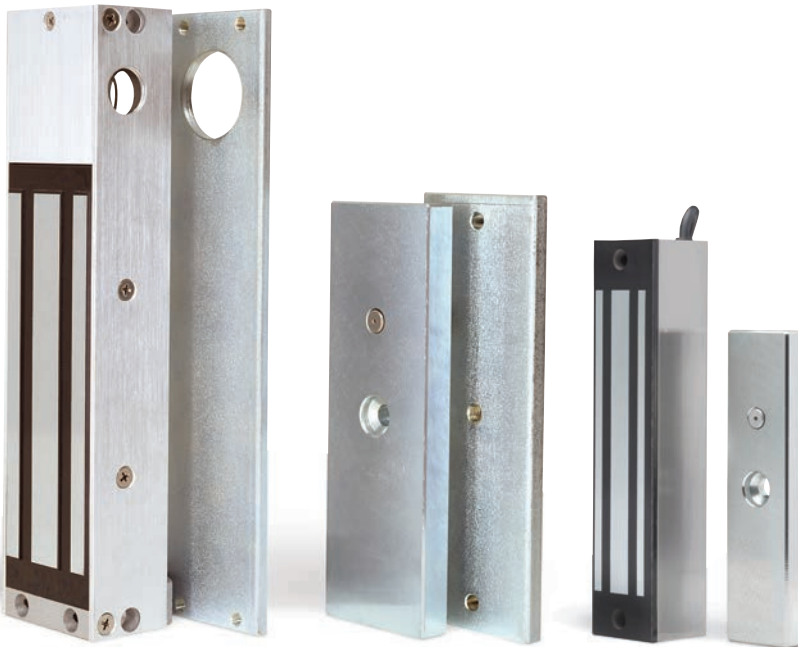

DKGL-S12 1200 Lb
Maglock and Armature with Welding Mounting Brackets

DKGL-S6 600 Lb
Maglock and Armature

DKML MAGNETIC LOCKS FOR DOORS

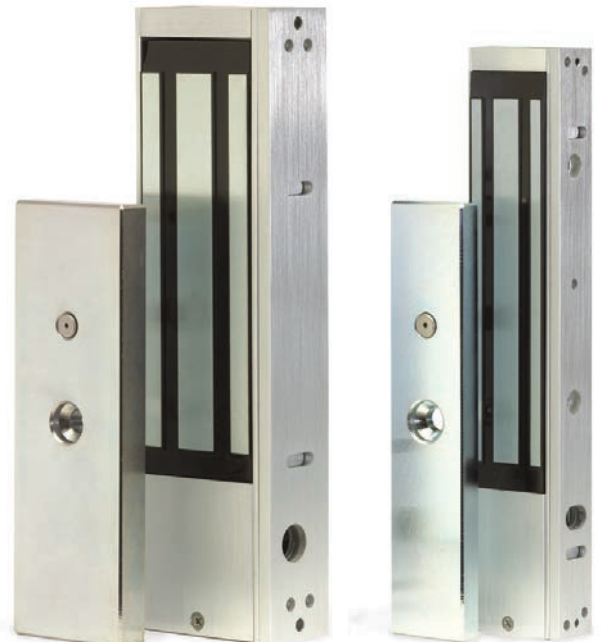

DKML-S12 1200 Lb
Armature and Maglock

DKML-S6 600 Lb
Armature and Maglock

Magnetic Gate & Door Lock Features

- Superior reliability, strength, and safety
- Fast and easy installation
- No residual magnetism
- Fail-safe operation assures that fire exit paths are unlocked during power outages
- MOV surge protection protects locks from transient voltage spikes
- No moving parts to wear out or break assures a long life cycle



Emergency Safety

Magnetic locks can be programmed to be automatically unlocked in emergency situations such as fires or power outages, ensuring fail-safe escape routes for all occupants.

Long Lasting

No moving parts to wear out or break which assures a locking device with an extremely long life



LOCKS / MAGNETIC & ELECTRIC

Single and Double Doors - 300, 600, 1200, and 2000 Lb (136, 272, 544, 907 Kg) lock strength


DKE ELECTRIC LOCKS / FOR DOORS & GATES

Single Door or Gate Strikes & Deadbolts



DKML-S3 300 Lb Armature and Maglock

DKSL-M20 2000 Lb Armature and Maglock

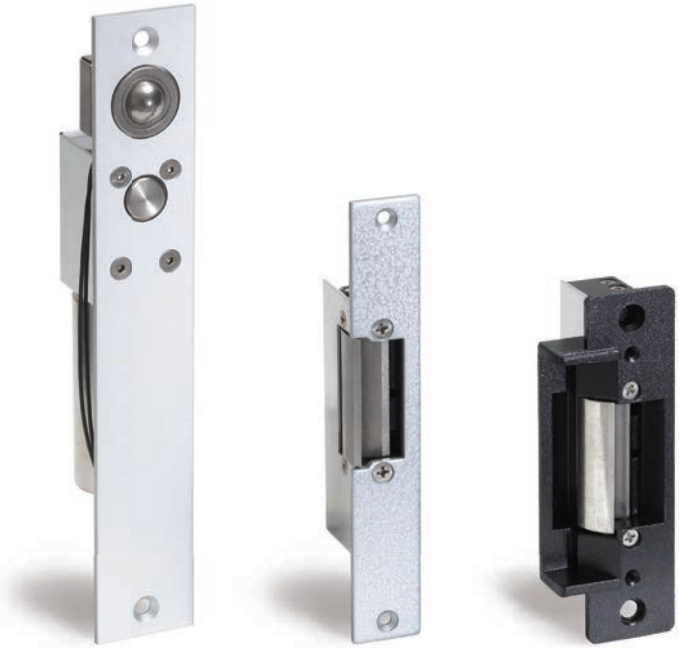

DKEB Deadbolt

DKES-C1 Strike

DKES-C2 Strike



Available for double door applications - DKML-S12 and DKML-S6

Electric Gate & Door Lock Features

Adjustable Auto Re-lock

Program a custom automatic re-lock time of 0-5 seconds for different access points and uses.

Dual Security

Deadbolt door locks have both mechanical and magnetic closure sensors for ensured security and will automatically lock even when the power is disconnected.

Strength

Holding force of 300 Lb (136Kg) to 2000 Lb (907Kg)



SPECIFICATIONS

DKGL MAGNETIC LOCKS - GATES

- Built-in relay on selected models for gate lock status indication
- Predrilled/tapped electrical enclosure conduit holes
- Mounting brackets are predrilled/tapped for easy welding to the gate and assembly to the mag lock (brackets included), making for easy installation, repairs, and replacement

DKML MAGNETIC LOCKS - DOORS

- LED (R/G) lock status indicates if the lock is secured (green) or not secured (red)
- Built-in time delay eliminates the need for costly add-on exit delay timers
- Shear locks provide both a magnetic and mechanical connection offering superior locking strength

DKE ELECTRIC LOCKS - DOORS & GATES

Electric dead bolts

- Provide superior security and safety with fail-safe operation
- Operate on 12-volt DC power
- 5/8 inch (15.875 mm) stainless steel bolt with 5/8 inch throw

Electric strikes

- Suitable for most cylindrical door locks
- Easily retrofit into most door or gate frames
- Operate on 12-volt DC power
- Door strikes are available in both fail-safe and fail-secure models
- 11/32" (8.73mm) or 20/32" (15.875mm) keepereither wired or by wireless expansion kit

FEATURES

| | MAGNETIC GATE LOCKS | | | MAGNETIC DOOR LOCKS | | | | ELECTRIC LOCKS | |
|--------------------|----------------------|----------------------|-----------|---------------------|--------------------|--------------------|-------------------|------------------|----------------------|
| | DKGL-S12 1216-080 | DKGL-S12 1216-081 | DKGL-S6-1 | DKML-S12 | DKML-S6 DKML-M6 | DKML-S3 DKML-M3 | DKSL-M20 Shear | Strikes DKES- | Deadbolts DKEB-M- |
| 1200 Lb (544Kg) | ✓ | ✓ | - | ✓ | - | - | - | - | - |
| 600 Lb (272Kg) | - | - | ✓ | - | ✓ | - | - | - | - |
| 300 Lb (136Kg) | - | - | - | - | - | ✓ | - | - | - |
| 2000 Lb (907Kg) | - | - | - | - | - | - | ✓ | - | - |
| Mounting | Surface | Surface | Surface | Surface | Both* | Both* | Surface | Mortise | Mortise |
| 12 Volt DC | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| 24 Volt DC | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | - | - |
| LED green/red | | | | ✓** | ✓** | | ✓** | | |
| Double door | | | | ✓ | ✓ | | | | |
| Fail-Safe | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| Fail-Secure | - | - | - | - | - | - | - | ✓ | - |
| Status Relay | - | ✓ | ✓ | ✓ | ✓ | - | ✓ | - | - |

* DKML-S6 & S3 are surface mount. DKML-M6 & M3 are mortise mount.

** Models available with and without LED light.

Compatible with these DKS telephone and access devices



Stand Alone Card Readers



Keypads



Basic Telephone



Access Plus



1830 Series

ACCESS CONTROL FEATURES

GATE LOCKS | MAGNETIC GATE LOCKS



Weldable Mounts


Weld the pre-drilled brackets directly to the gate before attaching the magnetic lock, allowing for hassle-free installation, maintenance & replacement.

Custom Mounting

Brackets can be fitted to pedestrian and vehicular gates of any shape or angle, allowing for custom mounting of magnetic locks with up to 1200 lbs. (544Kg) of holding force. Hardware provided.



SHEAR LOCKS | MAGNETIC DOOR LOCKS

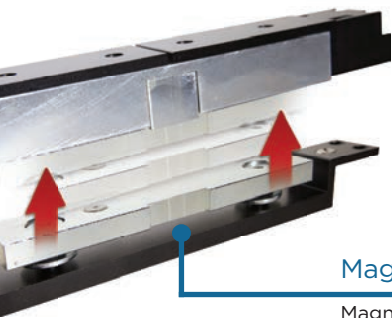

High Strength


Shear locks offer 2000 lbs. (907Kg) of holding force by combining high strength magnets with mechanically interlocking steel tabs that click into place and help prevent forced entry.

Magnetic Tight Closure

Magnet shifts armature into place upon closure, creating a tight seal but quickly releasing upon entry for easy, reliable access.



DEADBOLTS | ELECTRIC DOOR & GATE LOCKS

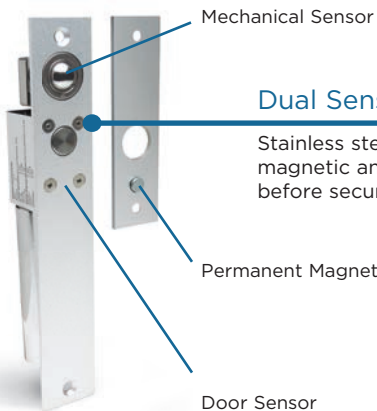

Dual Sensors

Stainless steel deadbolts can't be fooled, with both magnetic and mechanical sensors, door closure is ensured before securing deadbolt.

Fail-Safe

Locked when energized, and in the event of power failure will unlock for safe exit and entry.

Adjustable Auto Re-lock

Set a custom automatic re-lock time of 0-5 seconds - instantly relocking upon closure for high security applications or with a longer grace period for convenient delivery access.



ACCESSORIES:

Back-up Power Supply / Battery Charger

- Magnetic locks power supplies for backup DC power when primary (AC) power is interrupted
- Features filtered and electronically regulated output, as well as short circuit and thermal overload protection
- Built-in battery charger
- Enclosure accommodates up to two (2) 12 VDC / 7AH batteries
- Batteries are not included with these systems



Transformer Box and Transformers

- Magnetic Locks 12, 24 Volt DC
- Transformer box holds up to 4 transformers, and is suitable for indoor and outdoor use
- DC transformers and Regulated DC transformers available
- Use the 350mA transformers for 300 Lb (136Kg) locks, 500mA transformers for 600 Lb (272Kg) locks and the 500mA or 1000mA transformer for 1200 Lb (544Kg) locks



REGIONAL
SALES MANAGER
LOCATIONS

DOORKING U.S.A.

SEATTLE, WA
INDIANAPOLIS, IN
SACRAMENTO, CA
ALBANY, NY
PHOENIX, AZ
NASHVILLE, TN
ATLANTA, GA
DALLAS, TX
ORLANDO, FL
CHARLOTTE, NC
HOUSTON, TX
SAN DIEGO, CA
LEHIGH VALLEY, PA
LOS ANGELES, CA



MAGNETIC & ELECTRIC
DOOR & GATE LOCKS

ACCESS CONTROL



MADE IN USA

DOORKING, INC.

Access Control Solutions since 1948

120 S. Glasgow Avenue, Inglewood, California 90301 U.S.A.
Tel: 310-645-0023 · FAX: 310-641-1586 · www.doorking.com

© 2023 All Rights Reserved. Product specifications may change without notice. Rev. 2/23

DISTRIBUTED BY:

MEMBER:

