


24 Port 10/100 Mbps +2Combo PoE Switch

PoES-24380C+2Combo



10/100 Mbps

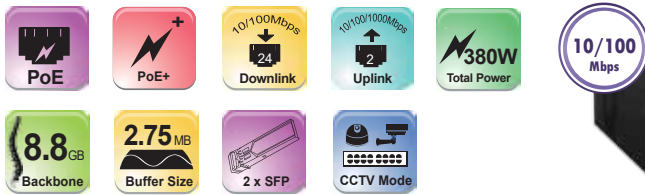

- Downlink: 24x100Mbps Ports
- Uplink: 2x1Gbps Port or 2 SFP (Combo)
- 380W (Avg:15W Max 30W per ch)
- Internal Power Supply
- Distance: Up to 100 Meter
- Built-in Surge Protection
- Complies With IEEE802.3af/at
- Status LCD Monitor
- CCTV mode:
 - Up to 250 meter at 10Mbps
 - Vlan function: no communication among downlink ports
- Rack mount bracket included

Specifications

MODEL	PoES-24380C+2Combo	
Interface	Downlink Ports	24 x 10/100/100Mbps
	Uplink Ports	2 x 10/100/1000Mbps
	SFP Ports*	2 x 10/100/1000Mbps
PoE	PoE Ports	24
	PoE Standard	IEEE802.3af/at PoE
	PoE Total Power	380W
	Average Power Per Channel	15.75W
	Maximum Power Per Channel	30W
Data Processing	Backbone Bandwidth	8.8Gbps
	Buffer Size	2.75Mb
	MAC Address Table	4K
	VLAN	Auto (In CCTV Mode)
Network Media	EIA/TIA-568	100Ω STP (Maximum 100m)
	10BASE-T	UTP Category 3, 4, 5 Cable (Maximum 100m)
	100BASE-TX	UTP Category 5, 5e Cable (maximum 100m)
	1000BASE-T	UTP Category 5e, 6, 7 Cable (Maximum 100m)
Special	CCTV Mode	Selectable Standard/CCTV Mode
	Surge Protector	Built-In
	Wall Bracket	No
	Rack Bracket	Yes
	K-Slot (Anti Theft)	Available
Power	PoE Status Monitor	Yes
	Power Supply	100-240VAC
Others	Power Consumption	PoE On: 395W Max. / PoE Off: 15W Max.
	Fan	No
	Dimensions	440*232*44mm
	Weight	4.5kg
	Operating Temperature	-0°C-40°C

*Uplink Ports cannot work simultaneously with the SFP ports

