


IR VANDAL-PROOF FISH EYE CAMERA (IP66)

FEI-360IP5 v2

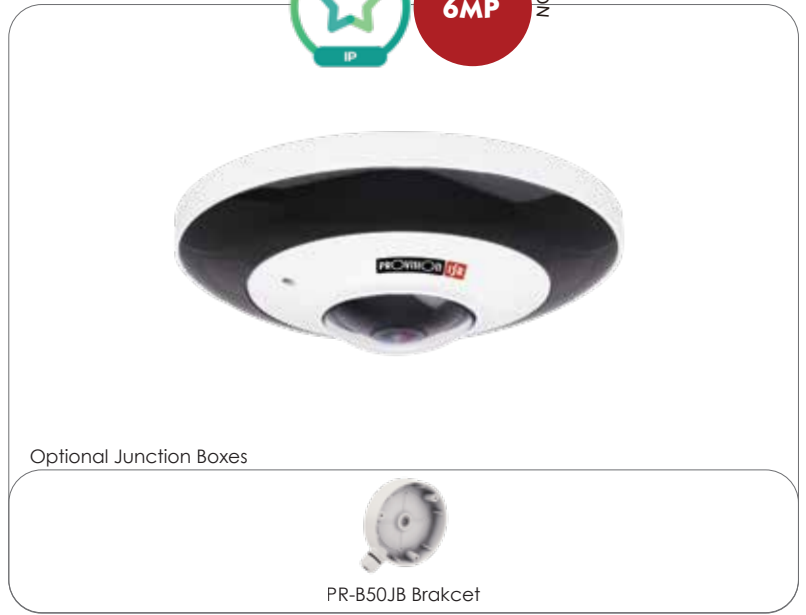

- | | | | |
|-------------------------------------|--------------------------------------|---------------------|-------------------------|
| 1/2.9" CMOS Sensor | ONVIF | 15m IR Illumination | I/O |
| 6 Mega-Pixel | Digital WDR / BLC / HLC | PoE Support | CVBS |
| True Day & Night (IR Cut Removable) | 3D Noise Reduction | Local Storage | IP 66 / IK10 Protection |
| H.265 (HEVC) Compression | Motion Detection and Privacy Masking | 2 Way Audio | |
| 0 Lux (IR On) Min. Illumination | 1.07mm 360° Lens | Built-In Microphone | |

Specifications

		Model	FEI-360IP5 v2
Camera	Video	Image Sensor	6MP 1/2.9" CMOS (3096 × 2196)
		Effective Pixels	2160x2160 (1:1)
		Electronic Shutter	1/25s ~ 1/100000s
		Frame Rate	1-25/30FPS
		Day & Night	ICR
		Min. Illumination	Day: 0.04lux / Night: 0.01lux (@F2.0, AGC On) 0lux with IR on
		Audio	Audio compression
	Communication		Two-way Audio
	Image Processing	Image Settings	AWB, AGC Adjustable Exposure Mode (Auto) Sharpness, Saturation, Brightness & Contrast Adjustable
		Image Enhancement	Digital WDR / BLC / HLC / ROI
		Noise Reduction	3D-DNR
		Image Orientation	Ceiling / Wall Installation
		Privacy Zone	Yes
		Motion Detection	Yes
		Analytics	No
Compression	Video Compression	H.265 / H.264	
	Resolution	5MP(2160x2160), 4MP(1920x1920), 2MP(1440x1440), 960x960, 480x480	
	View Modes	Fish-Eye (360° Bubble), 360° Stretched view (Lens Correction), 360° Split View, Fish-Eye (360° Bubble) + 3 Digital PTZ	
	Bit rate	64Kbps ~ 10Mbps@H.265 / 64Kbps ~ 10Mbps@H.264	
	Encode Mode	VBR/CBR	
Image Quality	Five levels under VBR; Free adjustment under CBR		

		IR Distance	15m (6 High Power Wide Angle IR LED)
Housing	Lens (Field of View)	1.07mm (360° for Ceiling Mount / 180° For Wall Mount)	
	Iris	Fixed Iris	
	Lens Mount	M12 mount	
	Protection Rate	Water Proof: IP66, Vandal Proof: IK10	
	Bracket	Surface Mount (Ceiling / Wall)	
	Dimensions	Φ130mm×41mm	
	Weight(gross)	605g	
Connectivity	Network	RJ45 (+PoE)	
	Power	DC Socket	
	Analog Video Output	CVBS (BNCx1)	
	Audio Connectivity	Built-in Microphone + Audio Input + Audio Output	
	SD Card	Event/Schedule based Main/Sub-Stream recording (Up to 128Gb)	
	RS485	Yes	
	Alarm	1Ch Input, 1Ch Output	
Network	Remote Monitoring	IE Browsing, CMS Software, Provision Cam2 Mobile App	
	User Access	Supports simultaneous monitoring for up to 10 users with multi-stream real time transmission	
	Network Protocol	TCP/IP, UDP, DHCP, NTP, RTSP, PPPoE, DDNS, SMTP, FTP, SNMP, P2P	
	ONVIF	Yes	
Others	Ethernet	100Mbps	
	PoE	Yes	
Power Supply	DC12V/~300mA / PoE/~3W		
Work Environment	-20 C ~ 50 C, 10%~90% Humidity		

