

G-5

SWING GATE OPERATOR



RESIDENTIAL AND COMMERCIAL

CLASS I, II, III, & IV VEHICULAR SWING GATE OPERATOR

HIGH EFFICIENCY MOTOR
 - Water resistant motor
 - High torque, Low current

OPTIONAL LOCK COVER
 - Prevents unwanted tampering

ADJUSTABLE POSITIVE STOP FOR PRECISION



PRE-WIRED FOR CONVENIENCE

PROTECTION
 - Powder coated aluminum alloy
 Prevents corrosion

BREAK AWAY JOINT
 - Allows operator to break free of
 The gate in the event of an impact,
 Reducing overall damage

COMPATIBLE WITH VIKING WIRELESS PRODUCTS

- Plug & Play connection for the Viking wireless expansion products.
- Viking Connect - Wireless Kit provides secure and reliable wireless communication when the application requires two single ECUs.
- Viking Monitor - Remote access to the control board settings, operator diagnostics, controls, gate status and error notifications, all from the convenience of a computer or any compatible hand held device

BATTERY BACKUP INCLUDED

- Standard Battery Backup provides 400 continuous cycles at 100% duty cycle.
- With Viking's "True" Battery Backup System, batteries are not used during normal operations, maximizing battery life.

LIGHTNING PROTECTION

- Advanced lightning strike protection up to 20,000 volts / 10,000 amps
- On-board surge protection monitoring.

PROTECTION

- Powder coating on aluminum alloy chassis provides long Lasting protection against corrosion

MANUAL RELEASE SWITCH


- Electronic disengagement so the gate can be moved freely

LARGE BOX OPTION

- A bigger box option that fits up to (2) 35 amp hour batteries is available

STRENGTH

- Strong and powerful design capable of handling up to 2000 Lbs or 18' long gates

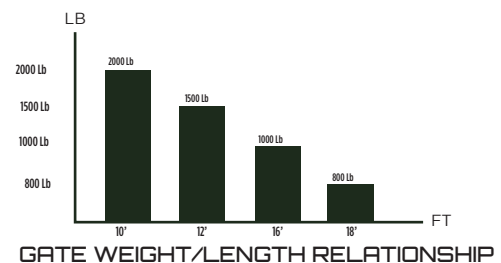

Operational Voltage 24 VDC 1/2 HP

Main Power Source Options 120/240 VAC Single Phase

Operating Angle 135° Max

Battery Backup 400 Full Contin. Cycles

Operating Speed 15-18 Seconds per 90°

Operating Temperature -20°F up to +160°F

Max Gate Capacity 2000 Lbs/10' or 800 lbs/18'

Max Duty Cycle 100% Contin. Cycle